



OPERATION INSTRUCTION

Universal control box

Specifications



Current: Max 15A
Voltage: 10-30V
IP rated: IP64
Cable: 1.2M with 5 cores
Screw mount

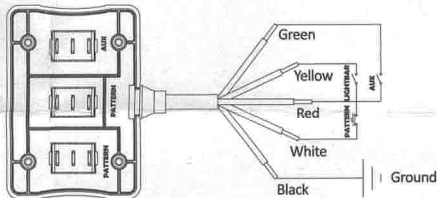

The universal control box is a low-cost switch solution for users wanting simplified controls. Typical it is used to control auxiliary light, the lightbar and flash pattern select.

I. Wiring Diagram

Wiring connection to the lightbar:

Red: Positive for all, Connect with power.

Black: Ground for all, Connect with power and negative of lightbar & auxiliary light

Yellow: Connect with positive of lightbar

White: Connect with pattern select of lightbar

Green: Connect with positive of auxiliary light

II. Switch Function

Red switch: On and Off for auxiliary light

Orange switch: On and Off for warning light

Black switch: Change the warning light pattern