




RoHS compliant

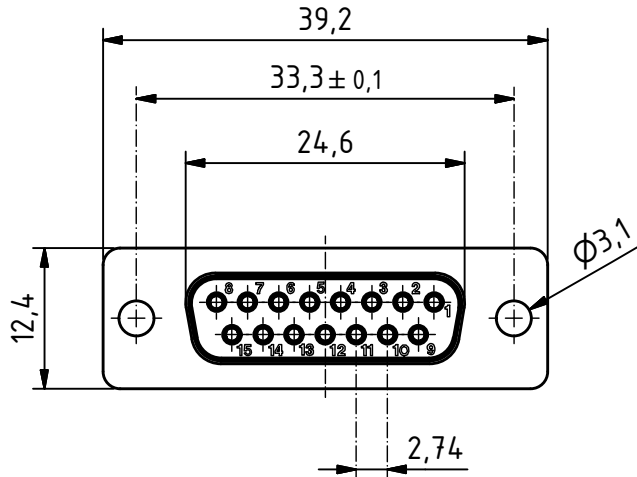

suitable for cable AWG 18 (single solid wire)

MATERIALS

- Insulator: Thermoplastic UL 94-V-0 white
- Contact: Machined / Copper alloy
- Contact finish: Quality class 2
- Shell: steel - zinc blue chromated

CHARAKTERISTICS

- Working voltage: 125V
- Current rating: 7.5A
- Contact resistance: max. 10mΩ - DIN41652
- Insulation resistance: >5GΩ
- Temperature range: -55° to +125°C

General tolerances (Deltron standard)				
size in mm				
> 0,5	> 3	> 6	> 30	
up to 3	up to 6	up to 30	up to 120	
tolerances				
±0,1	±0,2	±0,2	±0,3	

	All dimensions in mm	Rev.	Rev.	Rev.	DE002177		
		Rev.	Rev.	Rev.	part no.		
DT15SZ/2				1.5:1 scale	drawn	31.03.2010	mr
					checked		
					approved		
				Industrie NeuhoF 8c CH-3422 Kirchberg www.d-sub.swiss			
				K050006 drawing no.			